

BXRH

High Temperature Stationary Bellows, Complies with API 682.

This new design will provide optimal performance under conditions ranging from -100° F (-73° C) to 800° F (427° C). The bellows element remains static, securely bolted to the flange, resulting in the elimination of centrifugal forces and related mechanical stresses. Typical seal problems caused by an out-of-square seal chamber are minimized, resulting in extended seal life.

Features/Benefits

- Standard Alloy 718 Bellows-standardizes inventory on one material.
- Patented Distortion Free Face Design-face flatness maintained throughout operating ranges.
- Two Piece Design-ease of installation.
- Static Graphite Gasketing-leakage reduction due to elimination of dynamic gasket wear.
- Standard Anti-coke Device-helps keep atmospheric side clean.
- Bellows Material Alloy 718-complies with API 682, 610 and NACE MR-01-75 requirements.
- API 682 performance tested.


Materials of Construction

- Bellows: Alloy 718
- Rotating Face: Silicon Carbide
- Stationary Face: Carbon or Silicon Carbide
- Gasketing: Graphite
- Metal Parts: Rotating Assembly: 316 SS
Stationary Assembly: Alloy 718,
Low Expansion Alloy, 316 SS



Operating Parameters

- Maximum Pressure: Up to 300 psi (2070 kPa)
- Seal Chamber Temperature: *
-100° F to 800° F (-73° C to 427° C)
- Surface Speed: Up to 150 ft./sec. (46 m/sec.)
- Liquids: Hydrocarbons, Heat Transfer Fluids, Cryogenics
- Shaft Sizes: From 1 inch (25.4mm) to
5-1/8 inches (101.6mm)

* Depending on materials selected.

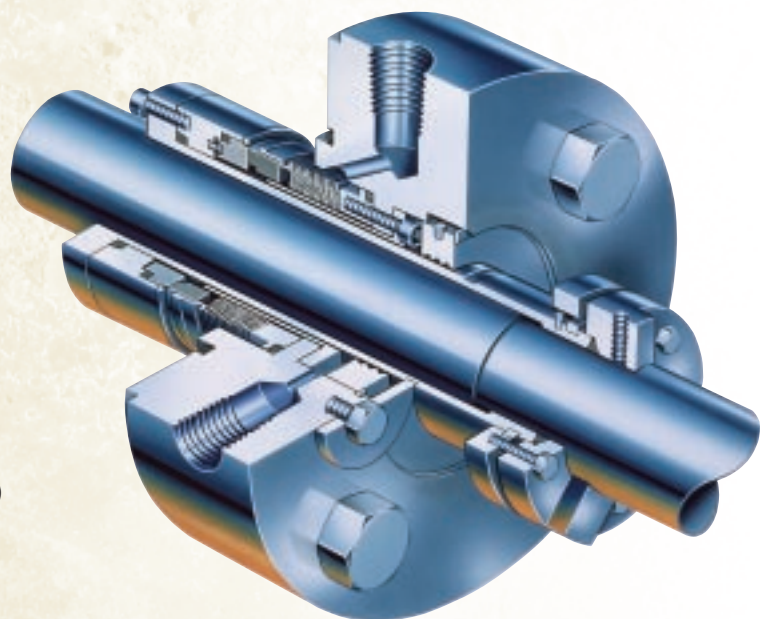

*BW Seals
Durametallic Seals
Pacific Wietz Seals
Pac-Seal*

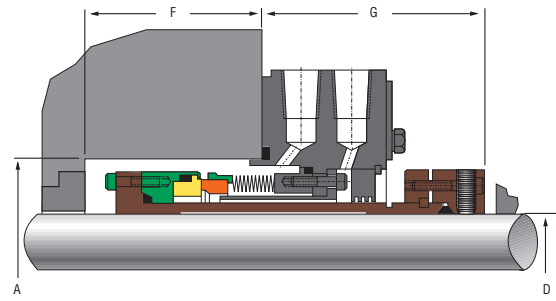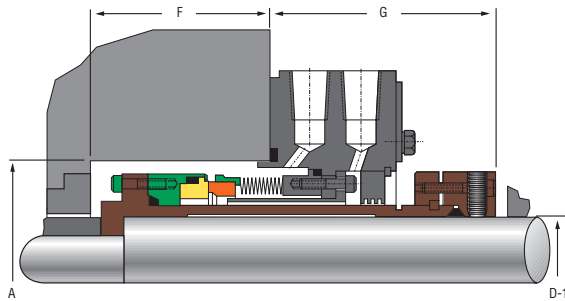

Dimensional Data

Seal Size	Inches					
	A	D	D-1	F	G	H
1250	2.438	0.857	1.017	2.656	3.281	1.875
1375	2.563	0.982	1.142	2.656	3.281	1.875
1500	2.688	1.107	1.267	2.594	3.313	1.906
1625	2.875	1.232	1.392	2.750	3.313	1.906
1750	3.000	1.357	1.517	2.687	3.406	2.000
1875	3.125	1.482	1.642	2.687	3.406	2.000
2000	3.250	1.607	1.767	2.719	3.406	2.000
2125	3.375	1.732	1.892	2.719	3.406	2.000
2250	3.500	1.857	2.017	2.719	3.406	2.000
2375	3.625	1.982	2.142	2.812	3.406	2.000
2500	3.750	2.107	2.267	2.812	3.406	2.000
2625	3.875	2.232	2.392	2.750	3.594	2.063
2750	4.063	2.357	2.517	2.719	3.594	2.063
2875	4.188	2.482	2.642	2.719	3.594	2.063
3000	4.375	2.607	2.767	2.781	3.594	2.063
3125	4.500	2.732	2.892	2.781	3.594	2.063
3250	4.625	2.857	3.017	2.781	3.594	2.063
3375	4.750	2.982	3.142	2.781	3.594	2.063
3500	4.875	3.107	3.267	2.781	3.594	2.063
3625	5.000	3.232	3.392	2.781	3.656	2.125
3750	5.125	3.357	3.517	2.781	3.656	2.125
3875	5.250	3.482	3.642	2.781	3.656	2.125
4000	5.375	3.607	3.767	2.781	3.656	2.125
4375	5.812	3.982	4.142	2.656	3.719	2.188
4875	6.438	4.482	4.642	2.625	3.750	2.219
5375	6.812	4.982	5.142	2.625	3.750	2.219

Seal Size	Metric (mm)					
	A	D	D-1	F	G	H
1250	61.9	21.8	25.8	67.5	83.3	47.6
1375	65.1	24.9	29.0	67.5	83.3	47.6
1500	68.3	28.1	32.2	65.9	84.1	48.4
1625	73.0	31.3	35.4	69.9	84.1	48.4
1750	76.2	34.5	38.5	68.3	86.5	50.8
1875	79.4	37.6	41.7	68.3	86.5	50.8
2000	82.5	40.8	44.9	69.1	86.5	50.8
2125	85.7	44.0	48.1	69.1	86.5	50.8
2250	88.9	47.2	51.2	69.1	86.5	50.8
2375	92.1	50.3	54.4	71.4	86.5	50.8
2500	95.2	53.5	57.6	71.4	86.5	50.8
2625	98.4	56.7	60.8	69.8	91.3	52.4
2750	103.2	59.9	63.9	69.1	91.3	52.4
2875	106.4	63.0	67.1	69.1	91.3	52.4
3000	111.1	66.2	70.3	70.6	91.3	52.4
3125	114.3	69.4	73.5	70.6	91.3	52.4
3250	117.5	72.6	76.6	70.6	91.3	52.4
3375	120.6	75.7	79.8	70.6	91.3	52.4
3500	123.8	78.9	83.0	70.6	91.3	52.4
3625	127.0	82.1	86.2	69.0	92.9	54.0
3750	130.2	85.3	89.3	69.0	92.9	54.0
3875	133.3	88.4	92.5	69.0	92.9	54.0
4000	136.5	91.6	95.7	69.0	92.9	54.0
4375	147.6	101.1	105.2	67.5	94.5	55.6
4875	163.5	113.8	117.9	66.7	95.3	56.4
5375	173.0	126.5	130.6	66.7	95.3	56.4

Note: For additional sizes and conditions not listed, contact your local Flowserve Representative.

The information and specifications presented in this product brochure are believed to be accurate, but are supplied for information purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, with respect to the product. Although Flowserve Corporation can provide general application guidelines, it cannot provide specific information for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper selection, installation, operation and maintenance of Flowserve products. Because Flowserve Corporation is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice.

Primary Worldwide Flow Solutions Division Locations

Licenseses, authorized agents, and affiliated companies located worldwide.

United States
Kalamazoo, MI
Phone 616-381-2650
Fax 616-381-8368

Temecula, CA
Phone 909-676-5662
Fax 909-308-4495

Canada
Edmonton, Alberta
Phone 708-463-7958
Fax 708-450-1241

St. Thomas, Ontario
Phone 519-631-9946
Fax 519-633-6164

Netherlands
Roosendaal
Phone 31-165-581-400
Fax 31-165-552-622

Argentina
Mendoza
Phone 54-261-427-2300
Fax 54-261-427-2524

Singapore
Phone 65-746-4318
Fax 65-747-1963

Mexico
Tlaxcala
Phone 52-2-461-6791
Fax 52-2-461-6847

Brazil
Sao Paulo
Phone 55-11-4066-8600
Fax 55-11-4066-7014

Japan
Osaka
Phone 81-720-85-5571
Fax 81-720-85-5575

Germany
Dortmund
Phone 49-231-6964-0
Fax 49-231-6964-248

Australia
Marayong NSW
Phone 61-2-8822-7100
Fax 61-2-9679-7511

www.flowserve.com