


D Series Balanced pusher seals

D Series seals are balanced pusher seals with a pumping ring built into the rotating seal face body that establishes an exclusive Plan 23 cooling chamber around the seal faces. D Series seals excel in high temperature boiler feed water and hot hydrocarbon services.

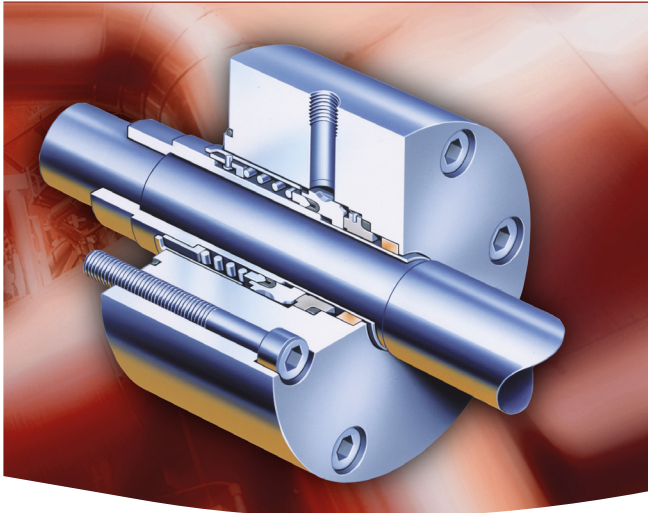

Features and Benefits


- Rotating seal face body integrates a pumping ring to maximize circulation flow through a Plan 23 seal cooler and return the flow directly at the seal interface, eliminating the expense of cool injection systems.
- Tungsten carbide rotating face is mounted and driven in an optimal, low stress configuration to remain flat under all operating conditions for very low leakage performance.
- Large, low spring rate single coil spring tolerates axial setting variations common to high temperature pumps.
- Robust U-cup seal flexibly mounts the rotating seal face while compensating for minor misalignment of the shaft and maintaining consistent seal face contact.
- Spring holder enables a strong drive linkage from the sleeve to the seal face while isolating the spring from torque.
- Seal installation is simplified with cartridge seal assembly or, as special equipment requirements demand, the seal can be installed by components.

Operating Parameters

Pressure	D:	Up to 1000 psi (69.0 bar)
	DP:	Up to 1500 psi (103.4 bar)
Temperature		-100 to 650°F (-73 to 343°C)
Specific Gravity		0.45 and higher
Shaft Speed		Up to 75 fps (23 m/s)
Shaft Size		0.525 to 5.400 inch (13.3 to 137.2 mm)

Materials of Construction

Metal Components	316 Stainless Steel
Rotating Face	Silicon Carbide, Tungsten Carbide
Stationary Face	Carbon
Gaskets	Fluoroelastomer, Perfluoro- elastomer, Nitrile, EPDM
Spring	316 Stainless Steel

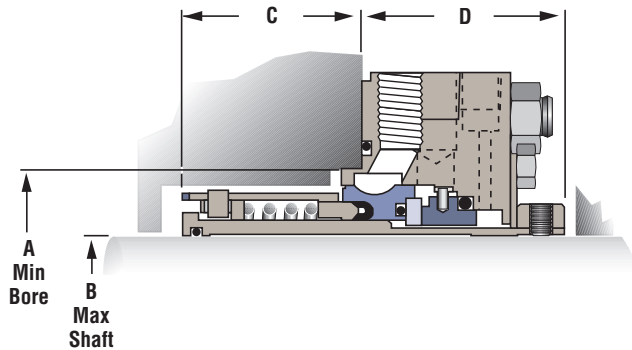

Specialized designs for specific applications

- DQ High balance face satisfies low hydrocarbon emissions levels.
- DP Custom designed stationary face for high pressure services up to 1500 psi (103.4 bar).
- DZ Short axial length design for short seal chambers.

Dimensional Data

Seal Size	inches					Seal Size	millimeters				
	A	B	C	C(DZ)	D		A	B	C	C(DZ)	D
1062	2.125	0.525	1.438	0.688	2.782	1062	53,98	13,34	36,53	17,48	70,66
1250	2.123	0.775	1.688	0.750	2.782	1250	53,92	19,69	42,88	19,05	70,66
1437	2.437	0.962	1.656	0.781	2.907	1437	61,90	24,43	42,06	19,84	73,84
1500	2.395	1.025	1.844	0.938	3.036	1500	60,83	26,04	46,84	22,82	77,01
1750	3.000	1.212	1.969	0.907	3.094	1750	76,20	30,78	50,01	23,04	78,59
1875	2.875	1.337	2.118	1.126	3.063	1875	73,03	33,96	53,80	28,60	77,80
2062	3.198	1.462	2.250	1.250	3.719	2062	81,23	37,13	57,15	31,75	94,46
2250	3.323	1.712	1.813	1.157	3.656	2250	84,40	43,48	46,05	29,39	92,86
2375	3.530	1.775	3.000	1.469	3.625	2375	89,66	45,09	76,20	37,31	92,08
2500	3.823	1.900	2.625	1.187	3.938	2500	97,10	48,26	66,68	30,15	100,02
2625	4.015	1.962	2.469	1.500	4.063	2625	101,98	49,83	62,71	38,10	103,30
2875	4.135	2.275	2.266	1.172	4.031	2875	105,03	57,79	57,56	29,77	102,39
3000	4.448	2.400	2.313	1.250	4.312	3000	112,98	60,96	58,75	31,75	109,52
3250	4.573	2.650	2.313	1.438	4.312	3250	116,15	67,31	58,75	36,52	109,52
3375	4.941	2.775	2.438	1.281	4.500	3375	125,50	70,49	61,93	32,54	114,30
3500	4.948	2.900	2.344	1.469	4.437	3500	125,68	73,66	59,54	37,31	112,70
3625	4.968	3.025	2.469	1.594	4.375	3625	126,19	76,84	62,71	40,49	111,12
3750	5.198	3.150	2.563	1.876	4.437	3750	132,03	80,01	65,10	47,65	112,70
4000	5.239	3.400	2.656	-	4.500	4000	133,07	86,36	67,46	-	114,30
4250	5.687	3.650	2.750	-	4.406	4250	144,45	92,71	69,85	-	111,91
4312	5.822	3.650	2.844	-	4.468	4312	147,88	92,71	72,24	-	113,49
4500	6.150	3.900	2.500	-	4.562	4500	156,21	99,06	63,50	-	115,87
4875	6.385	4.213	3.209	-	4.281	4875	162,18	106,98	81,51	-	108,74
5125	6.687	4.463	3.156	-	4.625	5125	169,85	113,33	80,16	-	117,48
5500	7.188	4.837	3.250	-	4.625	5500	182,55	122,86	82,55	-	117,48
6000	7.790	5.400	3.469	-	4.875	6000	197,87	137,16	88,11	-	123,82

Note: For additional sizes and conditions not listed, contact your local Flowserve representative.

FSD153eng REV 01-08 Printed in USA

To find your local Flowserve representative
 and find out more about Flowserve Corporation visit
www.flowserve.com

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

USA and Canada

Kalamazoo, Michigan USA
 Telephone: 1 269 381 2650
 Telefax: 1 269 382 8726

Europe, Middle East, Africa

Roosendaal, The Netherlands
 Telephone: 31 165 581400
 Telefax: 31 165 554590

Asia Pacific

Singapore
 Telephone: 65 6544 6800
 Telefax: 65 6214 0541

Latin America

Mexico City
 Telephone: 52 55 5567 7170
 Telefax: 52 55 5567 4224