


ML 2236 FDA

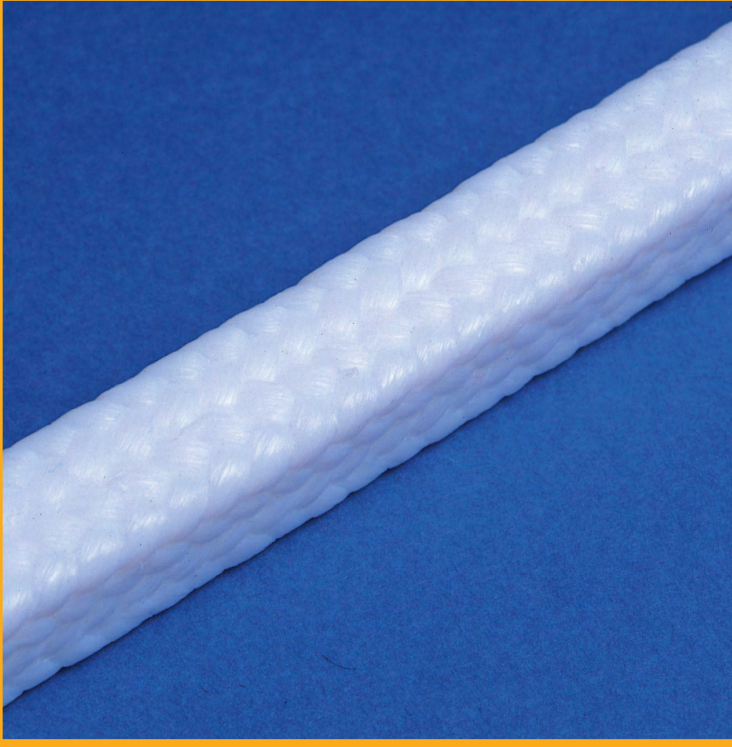

PRE-LUBED PTFE YARN PACKING

RECOMMENDED FOR

Applications in the food processing industry or where an FDA material is required.

FEATURES

Pure PTFE filament lubricated with a proprietary lubricant that complies FDA requirements.

SERVICE CONDITIONS

Shaft speeds to 1200 FPM; temperatures to 500°F/260°C; pH range 0-14.

CONSTRUCTION

Multi-Lok Braid

EQUIPMENT

Any equipment where braided packing is commonly used.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.