


ML 3600

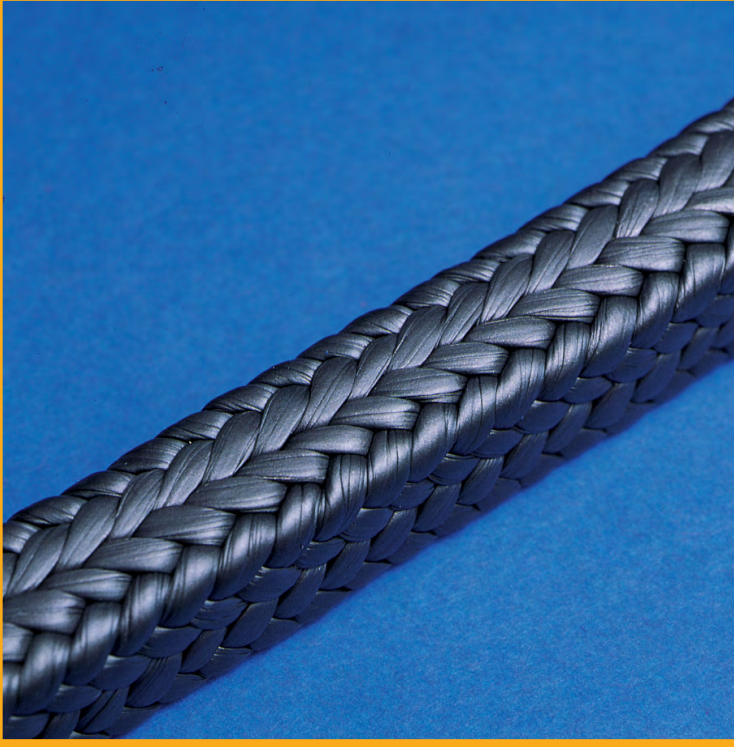

PACKING

RECOMMENDED FOR:

All corrosive applications suitable for PTFE and graphite.

FEATURES

PTFE/Graphite composite yarn for wide ranging plant applications including aggressive fluids and high temperatures

SERVICE CONDITIONS

Shaft speeds to 3600 FPM; temperatures to 550°F/287°C; pH range 0-14.

CONSTRUCTION

Multi-Lok Braid

EQUIPMENT

Pumps, agitators and mixers

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Updated April 2013

Quality Fluid Sealing Solutions for Industry.