


## ML 402

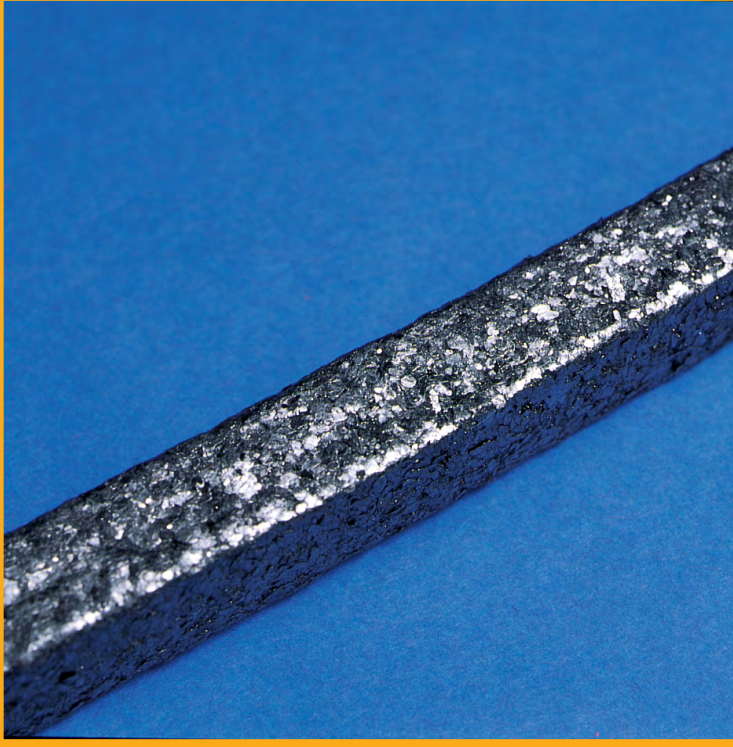

### GENERAL SERVICE PACKING

#### FEATURES:

Non-asbestos fibers treated with a specially formulated blend of lubricants having a saxoline base.

#### CONSTRUCTION

Multi-Lok Braid

#### TREATMENT

Each strand is individually coated with graphite and the braid is surface coated with graphite.

#### REMARKS

Good general service packing. The lubrication formulation makes the extra difference. The ductile nature of the lubricant prevents wicking and provides superior sealability.

*Style 402 - Same as ML402 except square braided.*

#### RECOMMENDED FOR:

Mild acids, alkalies, steam, brine, oil.

#### SERVICE CONDITIONS

Shaft speeds to 1885 FPM; temperatures to 450°F/232°C; pH range 4-10.

#### EQUIPMENT

General service on rotary and reciprocating equipment.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.