


**M L 4 4 6 1**

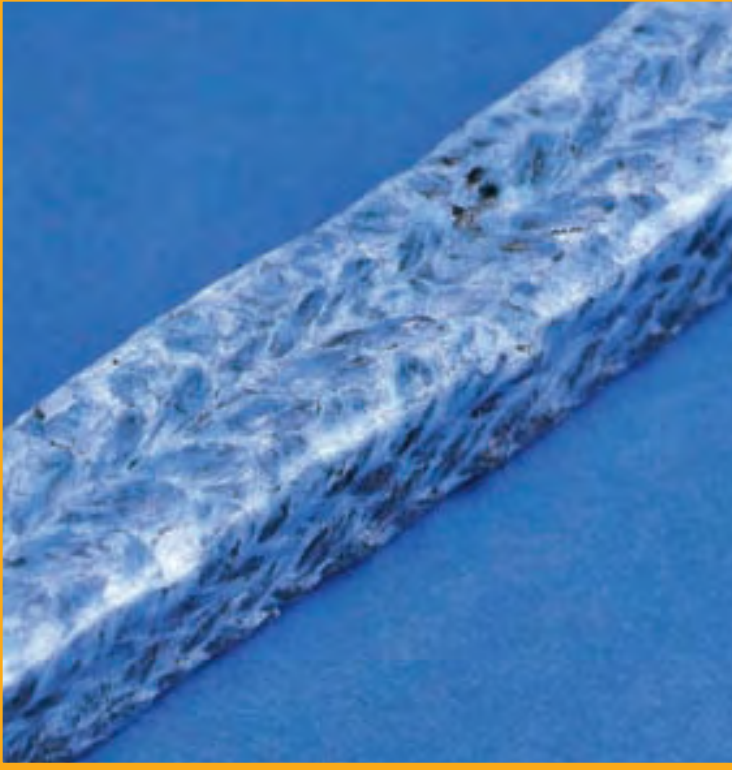

**FEATURES:**

ML 4461 Carlon is a carbon filament packing treated with PTFE to help prevent color contamination and carbon migration.

**TREATMENT**

Each strand of the carbon yarn is treated and impregnated with a PTFE suspensoid, totally encapsulating the packing to prevent carbon filaments migrating into the system.

**RECOMMENDED FOR:**

Most chemical services, except strong oxidizers.

**LIMITATIONS**

Shaft speeds to 3000 FPM; temperatures to 600°F/345°C; pH range 0-14.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.