


VISIT OUR WEB SITE AT www.sepcoUSA.com

Compressed Sheet Gasketing Product Information Sheet

Telephone
1-205-403-7500
1-800-633-4770

Fax
1-205-403-7592
1-800-426-3533

Style 500 / .002" Stainless Foil Binder

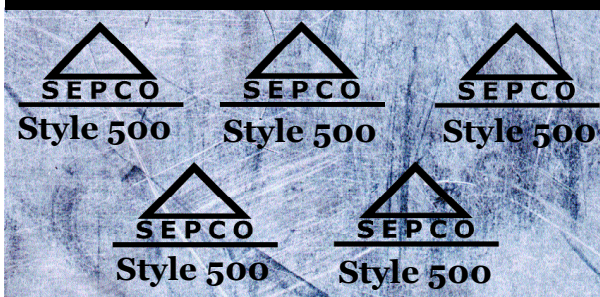

Style 500 is manufactured from 98% minimum pure graphite with a .002" thick 316 stainless steel insert that reduces gasket handling damage and increases pressure resistance. Style 500 has no binders or resins to cook out and will not cold flow. Recommended for high temperature and high pressure applications.

Specifications

Style:	500 Compressed Sheet Gasket
Binder:	.002" Stainless Foil Binder
Color:	Metallic
Temperatures:	In atmosphere: 932°F max In steam: 1200°F max
Pressures:	5000+ psi max
pH:	0-14
Sizes:	60" x 60"
Thickness:	1/64", 1/32", 1/16", 3/32", 1/8", 1/4"

"Since the performance of the gasket material is dependent on many other factors not related to the gasket itself, purchaser is WARNED that the maximum operating conditions shown in the Technical Data Chart may not be achieved under certain conditions. Purchaser is therefore urged to test the gasket material under the actual conditions of assembly and operation to determine the appropriate maximum operating conditions."

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Ref. G500-12/99

Certified to ISO 9001: 2000 Standards. Quality Fluid Sealing Solutions for Industry.

Please Call Us Today for Pricing and Availability
123 Airpark Industrial Road, Alabaster, AL 35007